AMS GROUP
OF COMPANIES

AFRICAN MARITIME SERVICES

AMS Marine Services FISHING DIVISION

BLOCKS



INDEX

CARGO BLOCKS	**2**
BMM KT 1t – 3t Nylon Sheave Single Blocks	2
BMM KT 1t – 6t Single Blocks	3
BMM KT 3t – 8t Single Tackle Blocks	4
SNATCH BLOCKS	**5**
BMM KS Snatch Blocks	5
TRAWL BLOCKS	**6**
BMM K 13t – 70t	6
BMM KO 11t – 20t Side Open	7

Cape Town +27 (0)21-510 3532
✉ info@africanmaritime.co.za

Mossel Bay +27 (0)44-023 0028
✉ info@africanmaritime.co.za


Walvis Bay & Lüderitz +264 (0)64 209 469
✉ fishing@amsmarine.com.na


CARGO BLOCKS


BMM KT 1t – 3t Nylon Sheave Single Blocks

- Galvanised.
- Nylon sheave.



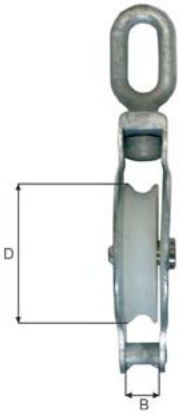





Stock code	Working Load Limit (ton)	Dimensions (mm) A	B	D	Becket ø (mm)	Maximum wire (mm)	Weight (kg)
KT1-N	1.0	163	22	80	16	16	1.0
KT2-N	2.0	195	24	110	22	18	2.0
KT3-N	3.0	257	28	150	31	20	4.0

Top fittings

Stock code	Swivel eye M (mm)	N (mm)	O (mm)	P (mm)	Swivel hook O (mm)	P (mm)	Q (mm)
KT1-N	25	38	13	65	20	82	25
KT2-N	23	55	16	94	25	94	28
KT3-N	26	66	20	110	30	105	30

Blocks must be ordered with one of the following:
E Swivel eye.
K Swivel hook. If the block is used with hook as suspension, the WLL is reduced with 50%.
G Galvanised is the standard finish.
On order add letter, e.g. KT1-N**E**G.

Against extra charge all blocks are available with:
B Becket.
C Tested with certificate.
On order add letter, e.g. KT1-NEG**C**.

Individual sheaves, bushing and pins can be ordered, contact African Maritime Services (PTY) Ltd. for further information.


CARGO BLOCKS

BMM KT 1t – 6t Single Blocks

- Galvanised.





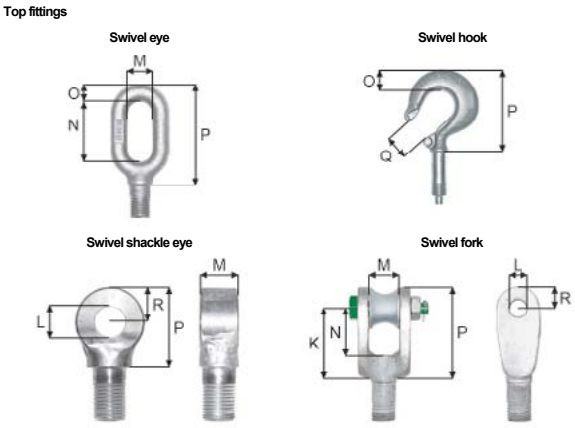

Stock code	Working Load Limit (ton)	Maximum load on head fitting	Test load (ton)	Dimensions (mm) A	B	C	Becket ø (extra charge) (mm)	Maximum wire (mm)	Weight (kg)
KT1	1.0	2.0	4.0	163	22	80	16	16	1.7
KT2	2.0	4.0	8.0	195	24	110	22	18	3.1
KT3	3.0	6.0	12.0	257	28	150	31	20	6.4
KT4	4.0	8.0	16.0	330	35	185	40	22	11.1
KT6	6.0	12.0	24.0	365	42	210	40	24	17.0

Top fittings

	Swivel eye				Swivel hook			Swivel shackle eye				Swivel fork					
Stock code	M (mm)	N (mm)	O (mm)	P (mm)	O (mm)	P (mm)	Q (mm)	L (mm)	M (mm)	R (mm)	P (mm)	K (mm)	L (mm)	M (mm)	N (mm)	R (mm)	P (mm)
KT1	25	38	13	65	20	82	25	-	-	-	-	-	-	-	-	-	-
KT2	23	55	16	94	25	94	28	-	-	-	-	-	-	-	-	-	-
KT3	26	66	20	110	30	105	30	-	-	-	-	-	-	-	-	-	-
KT4	35	68	23	134	38	132	38	29	42	35	93	104	23	40	65	30	134
KT6	40	90	26	153	46	170	46	33	46	42	104	104	23	40	65	30	134

Blocks must be ordered with one of the following:
1 Ball bearing; KT1, KT2 sealed ball bearings; KT3, KT4, KT6 greaseable ball bearings.
0 Bronze bushing; All bronze bushing are greaseable.
On order add number, e.g. KT2-**1.**

And one of the following:
E Swivel eye.
K Swivel hook. If the block is used with hook as suspension, the WLL is reduced with 50%.
F Swivel fork, KT4, KT6.
S Swivel shackle eye, KT4, KT6.
G Galvanised is the standard finish.
On order add letter, e.g. KT2-1**E**G.


Against extra charge all blocks are available with:
B Becket.
C Tested with certificate.
H Flame hardened sheave.
On order add letter, e.g. KT2-1EG**C**.

Individual sheaves, bushing and pins can be ordered, contact African Maritime Services (PTY) Ltd. for further information.

CARGO BLOCKS


BMM KT 3t – 8t Single Tackle Blocks

- Galvanised.

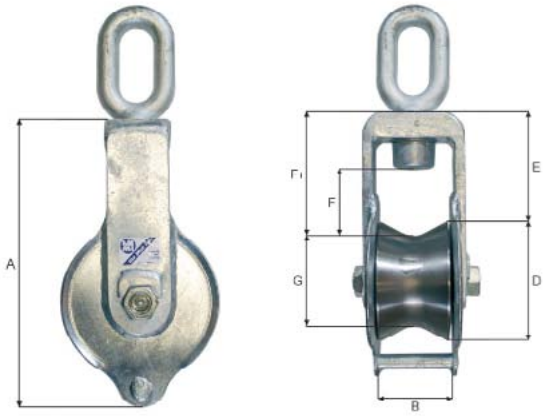


Top fittings


Swivel eye



Swivel shackle eye



Swivel fork



Stock code	Working Load Limit (ton)	Maximum load on head fitting (ton)	Test load (ton)	Dimensions (mm) A	B	D	E	F	F_1	G	Maximum wire (mm)	Weight (kg)
KT110	3.0	6.0	12.0	270	85	110	150	85	128	70	28	9.0
KT150	5.0	10.0	20.0	320	85	150	155	85	130	110	28	17.0
KT215	8.0	16.0	32.0	415	100	215	215	100	145	170	28	36.0
KT150/180	5.0	10.0	20.0	385	180	150	150	90	140	110	30	32.0

Top fittings

Stock code	Swivel eye M (mm)	N (mm)	O (mm)	P (mm)	Swivel fork K (mm)	L (mm)	M (mm)	N (mm)	R (mm)	P (mm)	Swivel shackle eye L (mm)	M (mm)	R (mm)	P (mm)
KT110	33	82	24	134	104	23	40	65	30	134	26	35	35	93
KT150	40	95	28	153	104	23	40	65	30	134	29	42	40	100
KT215	45	86	32	181	140	29	52	84	35	175	36	50	45	115
KT150/180	40	95	28	153										

Blocks must be ordered with one of the following:
1 Ball bearing; KT1, KT2 sealed ball bearings; KT3, KT4, KT6 greaseable ball bearings.
0 Bronze bushing; All bronze bushing are greaseable.
On order add number, e.g. KT150-**1.**

And one of the following:
E Swivel eye.
F Swivel fork.
S Swivel shackle eye.
G Galvanised is the standard finish.
On order add letter, e.g. KT150-1**E**G.

Against extra charge all blocks are available with:
C Tested with certificate.
H Flame hardened sheave.
On order add letter, e.g. KT150-1EG**C**.

Individual sheaves, bushing and pins can be ordered, contact African Maritime Services (PTY) Ltd. for further information.

SNATCH BLOCKS

BMM KS Snatch Blocks

Galvanized

Part no.	WLL 5:1	Max load on headfitting	Test load	A	B	D	I	Max wire	Weight
	ton	ton	ton	mm	mm	mm	mm	mm	kg
KS2	2.0	4.0	8.0	225	24	110	23	18	3.7
KS3	3.0	6.0	12.0	300	28	150	30	18	7.5
KS4	4.0	8.0	16.0	330	35	185	33	22	13.5
KS6	6.0	12.0	24.0	378	41	210	35	24	19.4

All snatch blocks must be closed during operation.

BMM-Blocks must be ordered with one of the following:

1 Ball bearing, greaseable; KS1, KS2 sealed ball bearings; KS3, KS4, KS6 greaseable ball bearings.
0 Bronze bushing. All bronze bushings are greaseable.

And one of the following.

E Swivel eye.
K Swivel hook.

On order add letter, e.g. KS2-1EG


Against extra charge all blocks are available with:


C Tested with certificate.
P Split pin at locking device.
H Flame hardend sheave.

On order add letter, e.g. KS2-1EGP



Split pin in locking device.

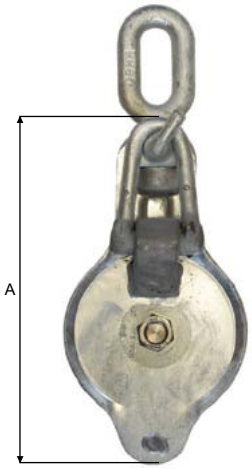


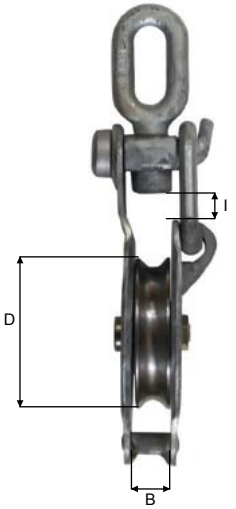


TRAWL BLOCKS

BMM K 13t – 70t

- Galvanised.
- Rollerbearing.
- Thrust bearing on top.

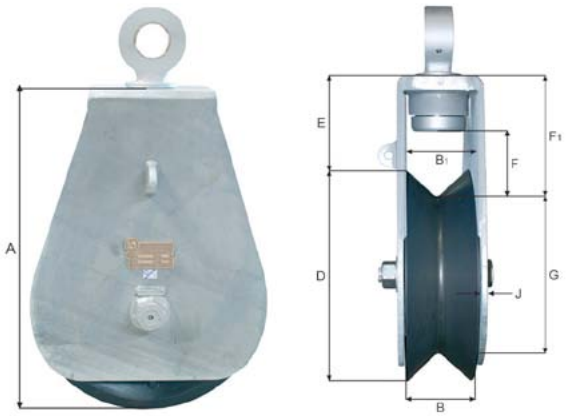

Top fittings

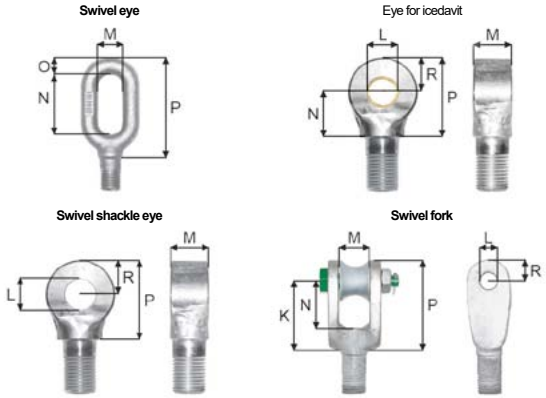

Stock code	Working Load Limit (ton)	Maximum load on head fitting (ton)	Test load (ton)	Dimensions (mm) A	B	B_1	D	E	F	F_1	G	J	Maximum wire (mm)	Weight (kg)
*K370-2A	13.0	26.0	52.0	580	140	140	370	260	120	245	285	12	28	115.0
*K400-2A	15.0	30.0	55.0	670	180	180	400	245	180	305	300	15	28	185.0
KH400-2A	20.0	40.0	70.0	685	180	180	400	285	180	334	300	20	28	225.0
K500-2A	20.0	40.0	70.0	785	180	180	500	285	185	345	380	20	30	275.0
K600-2A	30.0	60.0	95.0	910	180	180	600	310	190	380	480	20	32	360.0
K650-2A	30.0	60.0	95	985	240	220	650	335	225	415	500	20	34	500.0
KH650-2A	40.0	80.0	120	975	240	220	650	337	225	415	500	20	38	530.0
K800-2A	40.0	80.0	120	1125	240	220	800	325	240	440	600	20	38	750.0
KH800-2A	60.0	120.0	165	1200	240	230	800	400	242	500	600	25	40	895.0
K1000-2A	60.0	120.0	165	1485	260	240	1000	485	270	570	825	25	44	1320.0
K1200-2A	70.0	140.0	195	1640	260	240	1200	440	264	530	1020	30	44	1750.0

Top fittings

Stock code	Swivel eye M (mm)	N (mm)	O (mm)	P (mm)	Swivel fork K (mm)	L (mm)	M (mm)	N (mm)	R (mm)	P (mm)	Swivel shackle eye L (mm)	M (mm)	R (mm)	P (mm)	Eye for icedavit L (mm)	M (mm)	P (mm)	R (mm)	N (mm)	Eye for icedavit weight (kg)
K370	70	110	50	220	165	39	70	103	50	215	51	72	60	145	-	-	-	-	-	-
K400-2A	70	110	50	225	195	51	85	115	65	260	51	72	60	145	78	70	190	85	115	91.0
KH400-2A	70	110	50	225	195	51	85	115	65	260	51	72	60	145	78	78	190	85	115	91.0
K500-2A	75	140	55	280	195	51	85	115	65	260	58	80	70	160	78	78	190	85	115	91.0
K600-2A	100	155	70	335	230	58	90	140	75	305	-	-	-	-	106	108	240	100	135	116.0
K650-2A	100	155	70	335	230	58	90	140	75	305	-	-	-	-	106	108	240	100	135	116.0
KH650-2A	100	155	70	335	230	58	90	140	75	305	-	-	-	-	106	108	260	110	135	116.0
K800-2A	100	190	70	335	250	81	90	180	90	340	-	-	-	-	106	108	260	110	145	116.0
KH800-2A	100	190	70	335	250	81	90	180	90	340	-	-	-	-	125	168	300	130	170	150.0
K1000-2A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	125	168	300	130	170	150.0
K1200	-	-	-	-	-	-	-	-	-	-	-	-	-	-	125	168	304	130	174	170.0

*are only supplied with full sideplates.

Blocks must be ordered with one of the following:
E Swivel eye.
F Swivel fork.
S Swivel shackle eye.
I Eye for icedavit.
G Galvanised is the standard finish.
On order add letter, e.g. K600-2A**E**G.


Against extra charge all blocks are available with:
C Tested with certificate.
H Flame hardened sheave.
On order add letter, e.g. K600-2AEG**C**.


Individual sheaves, bushing and pins can be ordered, contact African Maritime Services (PTY) Ltd. for further information.

TRAWL BLOCKS

BMM KO 11t – 20t Side Open

- Blue painted.

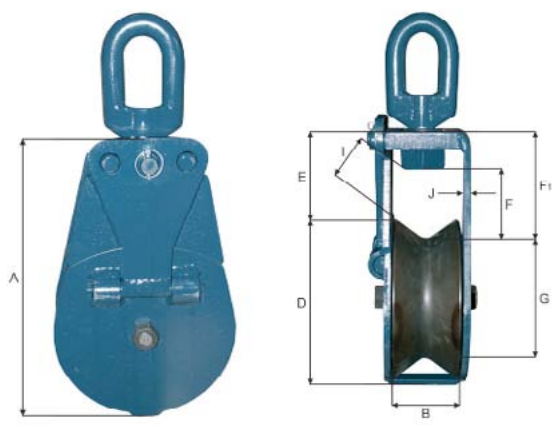

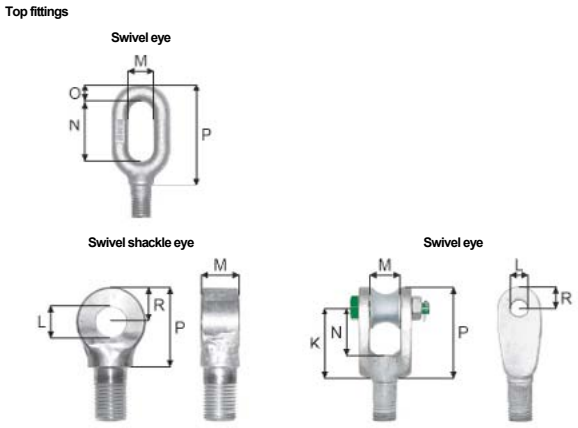

Stock code	Working Load Limit (ton)	Dimensions (mm) A	B	D	E	F	F1	G	I	J	Weight (kg)
KO300-1	11.0	485	120	300	170	125	205	240	90	12	69.0
KO370-2	13.0	600	140	380	190	150	235	285	100	12	125.0
KO400-2	15.0	670	180	400	210	175	270	300	125	15	187.0
KO500-2	20.0	825	180	500	260	185	310	380	115	20	300.0

Top fittings

Stock code	Swivel eye M (mm)	N (mm)	O (mm)	P (mm)	Swivel fork K (mm)	L (mm)	M (mm)	N (mm)	R (mm)	P (mm)	Swivel shackle eye L (mm)	M (mm)	R (mm)	P (mm)
KO300-1	48	105	38	203	140	29	52	84	35	175	43	58	50	125
KO400-2	58	110	50	225	195	51	85	115	65	260	51	72	60	145
KO500-2	75	140	50	280	195	51	85	115	65	260	58	80	70	160

Must be closed during operation.
KO300-1 are only available with ball bearing.
* Only available with rollerbearing.

Blocks must be ordered with one of the following:
E Swivel eye.
S Swivel shackle eye.
K Swivel hook.
On order add letter, e.g. KO400-2**E**.

Against extra charge all blocks are available with:
C Tested with certificate.
H Flame hardened sheave.
On order add letter, e.g. KO400-2E**C**.

Individual sheaves, bushing and pins can be ordered, contact African Maritime Services (PTY) Ltd. for further information.