AMS GROUP
OF COMPANIES

AFRICAN MARITIME SERVICES

AMS Marine Services FISHING DIVISION

# FLOATS & BUOYS



## INDEX


| | |
|---|---|
| **FLOATS** | **2** |
| Castro N-100 250mm (10") | 2 |
| N-130J (9.5") & N-140J (12″) | 3 |
| N-280 280mm (11") Hydro Trawl Floats | 4 |
| N-280 280mm (11") | 5 |
| N-90 200mm (8") & Titanium 280mm (11") | 6 |
| EVA (Ethylene Vinyl Acetate) foam Purse Seine floats | 7 |
| **BUOYS** | **8** |
| PA/R | 8 |
| A-HD Inflatable Buoys | 9 |
| BMA-D Inflatable Buoys | 10 |
| BPA Inflatable Buoys | 11 |
| BSK-2 | 12 |
| BSK-1 | 13 |
| CC-HD | 14 |
| CCFH | 15 |
| CCFL with Central Rod | 16 |
| CCFR with Centre Rod | 17 |
| CCRS | 18 |
| CCRT-4 | 19 |
| CPAL | 20 |
| BMDH & BMDT series | 21 |
| Rigid Cushioning Buoys Piscibuoy | 22 |
| CCFN with Centre Rod | 23 |
| Rigid Longline Mussel Buoys BMLL | 24 |
| TRB | 25 |



Cape Town +27 (0)21-510 3532
✉ info@africanmaritime.co.za

Mossel Bay +27 (0)44-023 0028
✉ info@africanmaritime.co.za

Walvis Bay & Lüderitz +264 (0)64 209 469
✉ fishing@amsmarine.com.na

# TRAWL FLOATS

## Castro N-100 250mm (10")

- Two side eyes.
- Injection moulded and friction welded.
- Available in 250 mm (10”).
- Specially designed for bottom trawling.

CASTRO







| REF | FLOCAS10/10 | FLOCAS10/13 | FLOCAS10/20 |
|---|---|---|---|
| Ø | 250 mm | 250 mm | 250 mm |
| Ø Hole | 26 mm | 26 mm | 26 mm |
| Buoyancy | 6.530 g | 6.530 g | 5.110 g |
| Maximum depth | 1.000 m | 1.300 m | 2.000 m |
| Working depth | 700 m | 900 m | 1.400 m |
| Impact strength | 35 kg/m | 42 kg/m | 50 kg/m |
| Colour | | | |
| Packing | 6 pcs. | 6 pcs. | 6 pcs. |

# TRAWL FLOATS

## N-130J (9.5") & N-140J (12")

- Two side eyes.
- Injection moulded and friction welded.
- Available in 240 mm (9.50") and 300 mm. (12").
- Specially designed for fishing with pelagic and semi- pelagic nets, and bottom trawling.

CASTRO



| REF | FLOCAS 9.5/3 | FLOCAS 9.5/5 | FLOCAS 9.5/15 | FLOCAS 9.5/25 | FLOCAS 12/3 | FLOCAS 12/5 | FLOCAS 12/13 | FLOCAS 12/20 | FLOCAS 12/30T |
|---|---|---|---|---|---|---|---|---|---|
| Ø | 240 mm | 240 mm | 240 mm | 240 mm | 300 mm | 300 mm | 300 mm | 300 mm | 300 mm |
| Ø Hole | 24 mm | 24 mm | 24 mm | 24 mm | 24 mm | 24 mm | 24 mm | 24 mm | 24 mm |
| Buoyancy | 6.040 g | 6.040 g | 4.130 g | 4.130 g | 12.350 g | 12.350 g | 10.800 g | 9.360 g | 8.110 g |
| Maximum depth | 300 m | 500 m | 1.500 m | 2.500 m | 300 m | 500 m | 1.300 m | 2.000 m | 3.000 m |
| Working depth | 210 m | 350 m | 1.050 m | 1.750 m | 210 m | 350 m | 900 m | 1.400 m | 2.500 m |
| Impact strength | 16 kg/m | 25 kg/m | 45 kg/m | 50 kg/m | 15 kg/m | 24 kg/m | 35 kg/m | 45 kg/m | 60 kg/m |
| Colour | ○ | ● | ● | ○ | ○ | ● | ● | ● | ● |
| Packing | 10 pcs. | 10 pcs. | 10 pcs. | 10 pcs. | 4 pcs. | 4 pcs. | 4 pcs. | 4 pcs. | 4 pcs. |

# TRAWL FLOATS

## N-280 280mm (11") Hydro Trawl Floats

- Special design with central hole and dimples that disrupt water flow during trawling.
- Injection moulded and friction welded.
- Significantly less resistance when towed through water than smooth floats.
- No vibration.
- Available in 2 sizes: 200 mm (8”) for depths of 1,700 and 2,000 m, and 280 mm (11”) for 1,500 and 2,000 m.

CASTRO



| |  |  |  |  |
|---|---|---|---|---|
| REF | FLOHIDRO08/17 | FLOHIDRO08/20T | FLOHIDRO11/15 | FLOHIDRO11/20T |
| Ø | 200 mm | 200 mm | 280 mm | 280 mm |
| Ø Hole | 21 mm | 21 mm | 24 mm | 24 mm |
| Buoyancy | 2.860 g | 2.450 g | 8.100 g | 7.110 g |
| Maximum depth | 1.700 m | 2.000 m | 1.500 m | 2.000 m |
| Working depth | 1.200 m | 1.400 m | 1.050 m | 1.400 m |
| Impact strength | 45 kg/m | 60 kg/m | 55 kg/m | 60 kg/m |
| Colour | ○ | ● | ● | ○ |
| Packing | 10 pcs. | 10 pcs. | 5 pcs. | 5 pcs. |

# TRAWL FLOATS

## N-280 280mm (11")

- Central hole design.
- Injection moulded and friction welded.
- Available in 280 mm (11”).
- Specially designed for mid-water and bottom trawling.

CASTRO



| | | | |
|---|---|---|---|
| REF | FLOCAS11/08 | FLOCAS11/13 | FLOCAS11/20 |
| Ø | 280 mm | 280 mm | 280 mm |
| Ø Hole | 24 mm | 24 mm | 24 mm |
| Buoyancy | 8.500 g | 8.110 g | 7.020 g |
| Maximum depth | 800 m | 1.300 m | 2.000 m |
| Working depth | 560 m | 900 m | 1.400 m |
| Impact strength | 35 kg/m | 55 kg/m | 60 kg/m |
| Colour | | | |
| Packing | 5 pcs. | 5 pcs. | 5 pcs. |

# TRAWL FLOATS

## N-90 200mm (8") & Titanium 280mm (11")

- Central hole design.
- Injection moulded and friction welded.
- Available in 200 mm (8”).
- Specially designed for mid-water and bottom trawling.

CASTRO



| | | | | | | |
|---|---|---|---|---|---|---|
| REF | FLOCAS08/6 | FLOCAS08/8 | FLOCAS08/13 | FLOCAS08/15 | FLOCAS08/20T | FLOCAS08/30T |
| Ø | 200 mm | 200 mm | 200 mm | 200 mm | 200 mm | 200 mm |
| Ø Hole | 21 mm | 21 mm | 21 mm | 21 mm | 21 mm | 21 mm |
| Buoyancy | 3.300 g | 2.990 g | 2.890 g | 2.650 g | 2.550 g | 2.500 g |
| Maximum depth | 600 m | 800 m | 1.300 m | 1.500 m | 2.000 m | 3.000 m |
| Working depth | 420 m | 560 m | 900 m | 1.050 m | 1.400 m | 2.500 m |
| Impact strength | 25 kg/m | 25 kg/m | 45 kg/m | 50 kg/m | 60 kg/m | 65 kg/m |
| Colour | ● | ● | ● | ● | ● | ● |
| Packing | 10 pcs. | 10 pcs. | 10 pcs. | 10 pcs. | 10 pcs. | 10 pcs. |

## EVA (Ethylene Vinyl Acetate) FOAM PURSE SEINE FLOATS

Compared to traditional PVC or synthetic rubber options, offer several physical advantages:

- **Zero Water Absorption:** They maintain maximum buoyancy because they do not soak up water over long periods.
- **Extreme Durability:** They are impact-resistant and flexible enough to pass through commercial net-haulers (power blocks) without cracking, shrinking, or deforming.
- **Weather & UV Resistance:** Built to withstand severe marine environments and intense sunlight exposure without degradation.



SHE EVA Floats

| Item | Specification( ± 5%) | | |
|---|---|---|---|
| | L x OD x HD (mm) | Weight (g) | Buoyancy (g) |
| SHE-40 | 208 x 185 x 37 | 585 | 3 800 |
| SHE-50 | 225 x 202 x 40 | 786 | 5 000 |
| SHE-70 | 250 x 220 x 42 | 1 000 | 7 000 |



SHBB Bullet Floats

| Item | Specification( ± 5%) | | |
|---|---|---|---|
| | L x OD x HD (mm) | Weight (g) | Buoyancy (g) |
| SHBB-1 | 356 x 153 x 25 | 600 | 5,000 |
| SHBB-2 | 356 x 178 x 25 | 900 | 5,700 |

# INFLATABLE BUOYS

## PA/R

- Materials: injection-moulded PVC eye. Rotomoulded PVC body.
- Solid injection-moulded eye.
- Specially designed to reduce drag when reeled in.
- Uniform wall thickness.
- Highly resistant to abrasion and sunlight.
- Smooth surface and glossy finish.
- Body manufactured in flexible material.
- Created for extreme resistance and to withstand severe conditions.
- High-quality plastic valve to guarantee a perfect seal.
- Available in 3 sizes.
- Available in the following colours: ○ ● ● ● ● ● ●
- Available in other colours on request.

CASTRO





| REF | BUOYCPAR1 | BUOYCPAR2 | BUOYPAR3 |
|---|---|---|---|
| Ø | 21 cm | 32 cm | 41 cm |
| Circumference | 70 cm | 98 cm | 125 cm |
| Length | 48 cm | 60 cm | 76 cm |
| Ø Eye | 25 mm | 25 mm | 25 mm |
| Buoyancy | 14 kg | 32 kg | 57 kg |
| Packing | 20 pcs | 10 pcs | 6 pcs |

Normal inflation pressure of 0.15 bar at approximately 20°C

# INFLATABLE BUOYS

## A-HD Inflatable Buoys

- Materials: injection-moulded PVC eye.  Rotomoulded PVC body.
- Solid injection-moulded eye. (1)
- Uniform wall thickness.
- Highly resistant to abrasion and sunlight.
- Smooth surface and glossy finish.
- Body manufactured in flexible material.
- Created for extreme resistance and to withstand severe conditions.
- High-quality plastic valve to guarantee a perfect seal. (2)
- Available in 7 sizes.
- Available in the following colours: ○ ● ● ● ● ● ●
- Available in other colours on request.

CASTRO






| REF | BUOYCAHD0 | BUOYCAHD1 | BUOYCAHD2 | BUOYCAHD3 | BUOYCAHD4 | BUOYCAHD5 | BUOYCAHD6 |
|---|---|---|---|---|---|---|---|
| Ø | 20 cm | 29 cm | 34 cm | 46 cm | 53 cm | 62 cm | 85 cm |
| Circumference | 70 cm | 90 cm | 110 cm | 144 cm | 166 cm | 194 cm | 267 cm |
| Length | 27 cm | 41 cm | 49 cm | 57 cm | 64 cm | 80 cm | 100 cm |
| Ø Eye | 25 mm | 25 mm | 25 mm | 25 mm | 25 mm | 35 mm | 35 mm |
| Buoyancy | 6 Kg | 15 Kg | 31 Kg | 56 kg | 90 kg | 160 kg | 326 kg |
| Packing | 30 pcs | 20 pcs | 15 pcs | 10 pcs | 10 pcs | 8 pcs | 5 pcs |

Normal inflation pressure of 0.15 bar at approximately 20°C

# INFLATABLE BUOYS

## BMA-D Inflatable Buoys

- Material: Rotomoulded PVC.
- Moulded from a single piece.
- Uniform wall thickness.
- Smooth surface and glossy finish.
- Body manufactured in flexible material.
- High-quality plastic valve to guarantee a perfect seal.
- Specially designed for swordfish and shark fishing.
- Excellent option for water-skiing and boat racing.
- Available in the following colours:

CASTRO



| REF | BUOYCBMAD |
|---|---|
| Ø | 23 cm |
| Ø Eye | 17 mm |
| Buoyancy | 5 kg |
| Packing | 40 pcs |

Normal inflation pressure of 0.15 bar at approximately 20°C

# INFLATABLE BUOYS

## BPA Inflatable Buoys

- Material: Rotomoulded PVC.
- Flexible reinforced central tube.
- Wide groove for winding ropes.
- Uniform wall thickness.
- Highly resistant to abrasion and sunlight.
- Smooth surface and glossy finish.
- Body manufactured in flexible material.
- Created for extreme resistance and to withstand severe conditions.
- High-quality plastic valve to guarantee a perfect seal.
- Specially designed for longline and trammel fishing.
- Available in 2 sizes.
- Available in the following colours: 🔴

CASTRO









| REF | BUOYCBPA1 | BUOYCBPA2 |
|---|---|---|
| Ø | 28 cm | 36 cm |
| Length | 35 cm | 47 cm |
| Ø Hole | 45 mm | 45 mm |
| Buoyancy | 17 kg | 33 kg |
| Packing | 20 pcs | 15 pcs |

Normal inflation pressure of 0.15 bar at approximately 20°C

# INFLATABLE BUOYS

## BSK-2

- Material: Rotomoulded PVC.
- Moulded from a single piece.
- Uniform wall thickness.
- Smooth surface and glossy finish.
- Body manufactured in flexible material.
- High-quality plastic valve to guarantee a perfect seal.
- Centre hole for anchoring
- Excellent option for water-skiing and boat racing.
- Available in the following colours: ○ ● ●

CASTRO





| REF | BUOYCBSK2 |
|---|---|
| Ø | 15 cm |
| Length | 19 cm |
| Ø Hole | 8 mm |
| Buoyancy | 2.5 kg |
| Packing | 50 pcs |

Normal inflation pressure of 0.15 bar at approximately 20°C

# INFLATABLE BUOYS

## BSK-1

- Material: Rotomoulded PVC.
- Moulded from a single piece.
- Uniform wall thickness.
- Smooth surface and glossy finish.
- Body manufactured in flexible material.
- High-quality plastic valve to guarantee a perfect seal.
- Excellent option for water-skiing and boat racing.
- Available in the following colours:

CASTRO



| | |
|---|---|
| REF | BUOYCBSK1 |
| Ø | 15 cm |
| Ø Eye | 10 mm |
| Buoyancy | 2 kg |
| Packing | 100 pcs |

Normal inflation pressure of 0.15 bar at approximately 20°C

# INFLATABLE BUOYS

## CC-HD

- Material: Rotomoulded PVC.
- Flexible reinforced central tube.
- Moulded from a single piece.
- Uniform wall thickness.
- Highly resistant to abrasion and sunlight.
- Smooth surface and glossy finish.
- Body manufactured in flexible material.
- Created for extreme resistance and to withstand severe conditions.
- High-quality plastic valve to guarantee a perfect seal.
- Available in 3 sizes.
- Available in the following colours: ○ ● ● ●

CASTRO



| REF | BUOYCCCHD2 | BUOYCCCHD3 | BUOYCCCHD4 |
|---|---|---|---|
| Ø | 43 cm | 52 cm | 60 cm |
| Circumference | 135 cm | 164 cm | 180 cm |
| Length | 44 cm | 55 cm | 65 cm |
| Ø Hole | 52 mm | 52 mm | 52 mm |
| Buoyancy | 31 Kg | 59 Kg | 110 Kg |
| Packing | 8 pcs | 5 pcs | 5 pcs |

Normal inflation pressure of 0.15 bar at approximately 20°C

# INFLATABLE BUOYS

## CCFH

- Materials: Rotomoulded PVC body. Steel rod and swivel with Rilsan coating.
- Moulded from a single piece.
- Uniform wall thickness.
- Highly resistant to abrasion and sunlight.
- Smooth surface and glossy finish.
- Body manufactured in flexible material.
- High-quality plastic valve to guarantee a perfect seal.
- Available in 3 sizes.
- Available in the following colours: ○ ● ● ●

CASTRO








| REF | BUOYCCCFH2 | BUOYCCCFH3 | BUOYCCCFH4 |
|---|---|---|---|
| Ø | 43 cm | 52 cm | 60 cm |
| Circumference | 135 cm | 164 cm | 180 cm |
| Length | 44 cm | 55 cm | 65 cm |
| Total Length | 87 cm | 90 cm | 92 cm |
| Buoyancy | 27 kg | 55 kg | 104 kg |

Normal inflation pressure of 0.15 bar at approximately 20°C

# INFLATABLE BUOYS

## CCFL with Central Rod

- Materials: Rotomoulded PVC body. Zinc coating steel rod and swivel.
- Moulded from a single piece.
- Uniform wall thickness.
- Highly resistant to abrasion and sunlight.
- Smooth surface and glossy finish.
- Extra long rod.
- High-quality plastic valve to guarantee a perfect seal.
- Available in 3 sizes.
- Available in the following colours: ○ ● ●

CASTRO








| REF | BUOYCCCFL1 | BUOYCCCFL2 | BUOYCCCFL3 |
|---|---|---|---|
| Ø | 30 cm | 32 cm | 42 cm |
| Circumference | 97 cm | 100 cm | 140 cm |
| Length | 40 cm | 43 cm | 54 cm |
| Total Length | 90 cm | 110 cm | 117 cm |
| Buoyancy | 8 kg | 12 kg | 22 kg |

Normal inflation pressure of 0.15 bar at approximately 20°C

# FLEXIBLE BUOYS

## CCFR with Centre Rod

- Materials: Rotomoulded PVC body. Steel rod and swivel with Rilsan coating.
- Moulded from a single piece.
- Uniform wall thickness.
- Highly resistant to abrasion and sunlight.
- Smooth surface and glossy finish.
- Body manufactured in flexible material.
- Filled with closed-cell polyurethane foam.
- Available in 3 sizes.
- Available in the following colours: ○ ● ● ●

CASTRO








| REF | BUOYCCCFR2 | BUOYCCCFR3 | BUOYCCCFR4 |
|---|---|---|---|
| Ø | 40 cm | 46 cm | 60 cm |
| Circumference | 125 cm | 142 cm | 180 cm |
| Length | 44 cm | 55 cm | 65 cm |
| Total Length | 87 cm | 90 cm | 92 cm |
| Buoyancy | 25 kg | 52 kg | 100 kg |
| Packing | 2 pcs | 1 pcs | 1 pcs |

# FOAMED BEACON

## CCRS

- Material: Rotomoulded PVC.
- Flexible reinforced central tube.
- Moulded from a single piece.
- Uniform wall thickness.
- Highly resistant to abrasion and sunlight.
- Smooth surface and glossy finish.
- Body manufactured in flexible material.
- Created for extreme resistance and to withstand severe conditions.
- Filled with closed-cell polyurethane foam.
- Available in 3 sizes.
- Available in the following colours: ○ ● ● ●

CASTRO



| REF | BUOYCCCRS2 | BUOYCCCRS3 | BUOYCCCRS4 |
|---|---|---|---|
| Ø | 40 cm | 46 cm | 60 cm |
| Circumference | 125 cm | 142 cm | 180 cm |
| Length | 44 cm | 55 cm | 65 cm |
| Ø Hole | 52 mm | 52 mm | 52 mm |
| Buoyancy | 30 kg | 54 kg | 110 kg |
| Packing | 2 pcs | 1 pcs | 1 pcs |

# RIGID MOORING BUOYS

## CCRT-4

- Materials: rotomoulded polyethylene body. Galvanized steel tube in central hole. Filled with closed-cell polyurethane foam.
- Central tube prepared for use with chain (maximum 12 mm).
- Uniform wall thickness.
- Flat surface.
- Created for extreme resistance and to withstand severe conditions.
- Available in the following colours: ○ ●

CASTRO







| REF | BUOYCCCRL2 |
|---|---|
| Ø | 55 cm |
| Circumference | 178 cm |
| Length | 65 cm |
| Total length | 75 cm |
| Ø Tube | 5 cm |
| Buoyancy | 100 kg |
| Packing | 1 pcs |

# RIGID MARKER BUOYS

## CPAL

- Material: rotomoulded polyethylene.
- Moulded from a single piece.
- Uniform wall thickness.
- Flat surface.
- Specially designed for marking grill nets and long lines.
- Can also be used for anchoring.
- Available in the following colours: 🟡🟠

CASTRO




| REF | BUOYCCPAL |
|---|---|
| Ø | 24 cm |
| Length | 44 cm |
| Ø Eye | 40 mm |
| Buoyancy | 10 kg |
| Packing | 17 pcs |

# RIGID MODULAR BUOYS

## BMDH & BMDT series

- Materials: rotomoulded polyethylene body. Steel rod and swivel with Rilsan coating. Filled with closed-cell polyurethane foam.
- Rod diameter of 30 mm.
- Modular design.
- Moulded from a single piece.
- Uniform wall thickness.
- Flat surface.
- Modules of 250 and 500 kg to obtain different levels of buoyancy.
- Specially designed for cushioning in fish farms.
- Suitable for marking and boat anchoring.
- Available in the following colours:

CASTRO

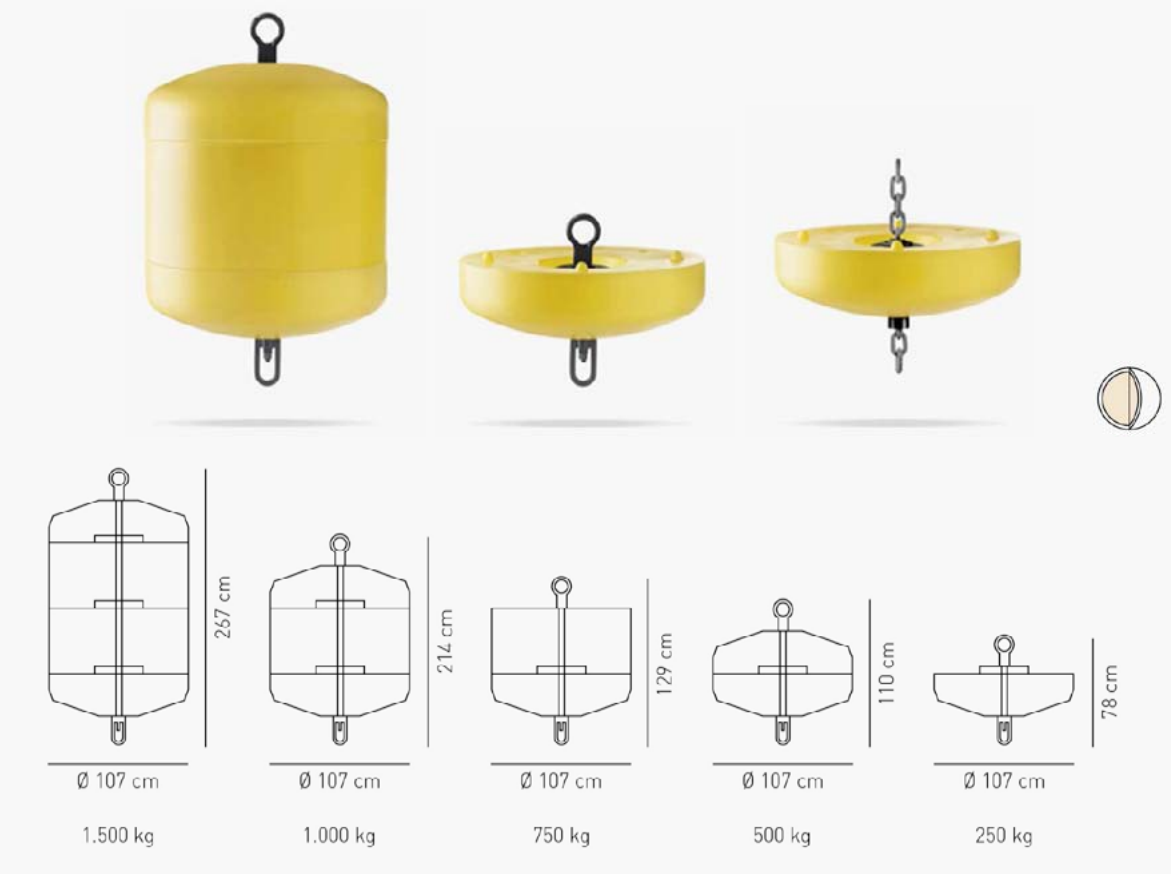


| REF | BUOYCBMDH 1500 | BUOYCBMDH 1000 | BUOYCBMDH 750 | BUOYCBMDH 500 | BUOYCBMDH 250 | BUOYCBMDT 250 |
|---|---|---|---|---|---|---|
| Ø | 107 cm | 107 cm | 107 cm | 107 cm | 107 cm | 107 cm |
| Length | 221 cm | 168 cm | 83 cm | 64 cm | 32 cm | 32 cm |
| Total length | 267 cm | 214 cm | 129 cm | 110 cm | 78 cm | 40 cm |
| Buoyancy | 1.500 kg | 1.000 kg | 750 kg | 500 kg | 250 kg | 250 kg |
| Packing | 1 pcs | 1 pcs | 1 pcs | 1 pcs | 1 pcs | 1 pcs |

# RIGID BUOYS


## Rigid Cushioning Buoys Piscibuoy


- Materials: rotomoulded polyethylene body. Filled with closed-cell polyurethane foam. Steel rod and swivel with Rilsan coating.
- Rod diameter of 30 mm.
- Moulded from a single piece.
- Uniform wall thickness.
- Flat surface.
- Specially designed for cushioning in fish farms.
- Available in 2 sizes.
- Available in the following colours:

CASTRO









| REF | BUOYCPISC850 | BUOYCPISC1400 |
|---|---|---|
| Ø | 91 cm | 116 cm |
| Length | 121 cm | 121 cm |
| Total length | 170 cm | 170 cm |
| Buoyancy | 650 kg | 1.100 kg |
| Packing | 1 pcs | 1 pcs |

# RIGID BUOYS

## CCFN with Centre Rod

- Materials: rotomoulded polyethylene body. Steel rod and swivel with Rilsan coating.
- Moulded from a single piece.
- Uniform wall thickness.
- Highly resistant to abrasion and sunlight.
- Smooth surface and glossy finish.
- Filled with closed-cell polyurethane foam.
- Available in 3 sizes.
- Available in the following colours: ○ ● ● ●

CASTRO








| REF | BUOYCCCFN2 | BUOYCCCFN3 | BUOYCCCFN4 |
|---|---|---|---|
| Ø | 40 cm | 46 cm | 55 cm |
| Circumference | 125 cm | 142 cm | 178 cm |
| Length | 45 cm | 55 cm | 65 cm |
| Total Length | 87 cm | 90 cm | 92 cm |
| Buoyancy | 28 kg | 56 kg | 107 kg |
| Packing | 2 pcs | 1 pcs | 1 pcs |

# RIGID BUOYS

## Rigid Longline Mussel Buoys BMLL

- Materials: rotomoulded polyethylene body. Filled with closed-cell polyurethane foam.
- Rigid double-eye design for stability of buoy in swell.
- Specially designed for longline mussel farming.
- Moulded from a single piece.
- Uniform wall thickness.
- Flat surface.
- Available in the following colours: 🟡

CASTRO










| REF | BUOYCBMLL1 | BUOYCBMLL2 |
|---|---|---|
| Ø | 45 cm | 45 cm |
| Circumference | 105 cm | 105 cm |
| Length | 50 mm | 50 mm |
| Foam | ✓ | X |
| Buoyancy | 120 kg | 130 kg |
| Packing | 1 pcs | 1 pcs |

## PERIMETER BUOYS


### TRB


- Materials: rotomoulded polyethylene body. AISI 316 stainless steel structure. Filled with closed-cell polyurethane foam.
- Supplied in a single piece.
- All parts are welded for better performance and durability.
- No assembly required.
- St. Andrew's Cross, special mark, starboard mark, port mark, etc. can be mounted on request.
- Recommended mooring: minimum mooring load of 3,000 kg.
- Mooring chain of 300 kg.
- Available in the following colours: 🟡

CASTRO

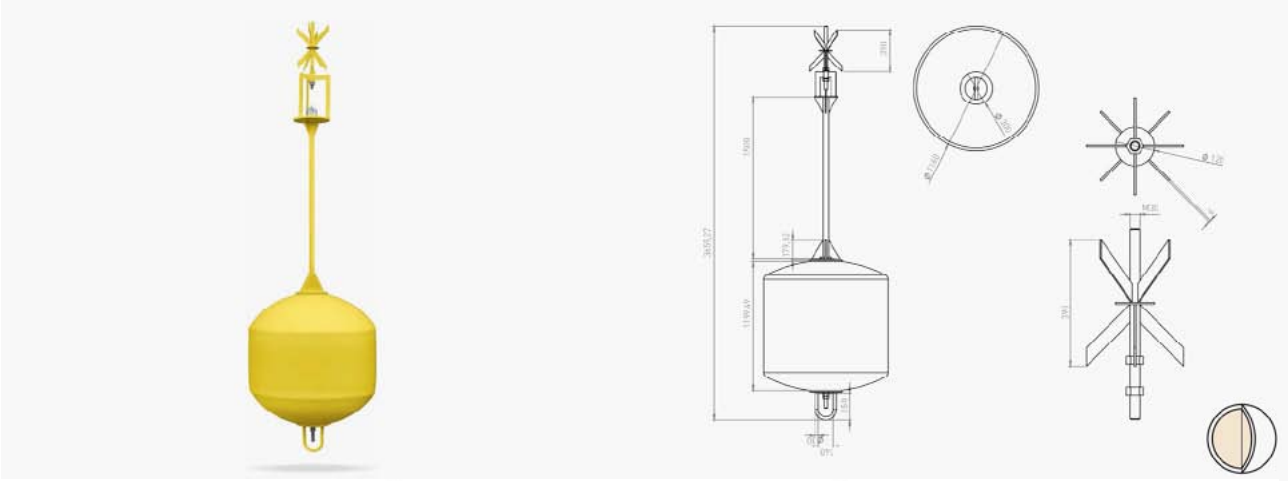







| REF | BUOYCTRB1400 | BUOYCTRB1401 |
|---|---|---|
| Ø | 116 cm | 116 cm |
| Length | 121 cm | 121 cm |
| Focal height | 2-3 m | 2-3 m |
| Volume | 1,75 $m^3$ | 1,75 $m^3$ |
| Buoyancy | 1.100 kg | 1.100 kg |
| Total weight | 141 kg | 141 kg |
| Solar light | 1-2 millas | 2-3 millas |