AMS GROUP
OF COMPANIES

AFRICAN MARITIME SERVICES

AMS Marine Services FISHING DIVISION

HOOKS & LINKS



INDEX

LINKS	**2**
G-Hooks & Links	2
Split Links	3
BMM G-hooks	4
BMM Recessed Rings	5
HOOKS	**6**
Grade 100 Eye Sling Hooks	6
BMM Safety Hooks	7
Sling, Cargo Hooks	8
YOYO Hooks	9

Cape Town +27 (0)21-510 3532
✉ info@africanmaritime.co.za

Mossel Bay +27 (0)44-023 0028
✉ info@africanmaritime.co.za


Walvis Bay & Lüderitz +264 (0)64 209 469
✉ fishing@amsmarine.com.na

LINKS

G-Hooks & Links

G-hook - Steel - Blue painted

Stock code	W.L.L. (tons)	Thickness (mm)	Dimensions (mm) A	B	D	E	F	Weight (kg)
HOOKEG01	1.0	12	88	55	17	10.5	14	0.36
HOOKEG02	1.5	16	107	66	20	13.0	19	0.60
HOOKEG03	3.2	20	123	77	26	15.0	22	0.90
HOOKEG04	4.4	25	150	95	32	20.0	26	1.80
HOOKEG05	5.6	30	180	115	38	23.0	31	3.10
HOOKEG06	10.0	35	195	126	41	25.0	34	4.40
HOOKEG07	12.5	40	230	140	47	28.0	38	6.60

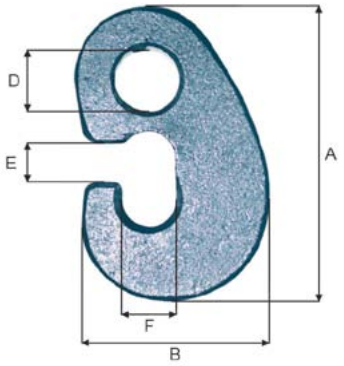

Recessed link - Steel - Blue painted

Stock code	W.L.L. (tons)	ø (mm)	Dimensions (mm) A	B	Recess (mm)	Weight (kg)
LINKREC12/1	1.0	12	70	30	10	0.20
LINKREC16/1	1.5	16	85	35	12	0.40
LINKREC20/1	3.2	20	110	45	14	0.90
LINKREC25/1	4.4	25	130	50	18	1.50
LINKREC28/1	5.6	28	150	60	21	2.10
LINKREC32/1	10.0	32	150	60	23	2.80
LINKREC35/1	12.5	35	160	73	26	3.80



Part combinations - Steel - Blue painted

Stock code	W.L.L. (tons)	Description			Weight (kg)
HOOKGT12/1	1.0	RINGBO12-70	+	HOOKEG01	0.70
HOOKGT16/1	1.5	RINGBO16-85	+	HOOKEG02	1.00
HOOKGT19/1	3.2	RINGBO19-110	+	HOOKEG03	1.60
HOOKGT25/1	4.4	RINGBO25-130	+	HOOKEG04	3.20
HOOKGT28/1	5.6	RINGBO28-150	+	HOOKEG05	5.60
HOOKGT32/1	10.0	RINGBO32-150	+	HOOKEG06	6.80
HOOKGT35/1	12.5	RINGBO35-140	+	HOOKEG07	9.50



Part combinations - Steel - Blue painted

Stock code	W.L.L. (tons)	Description					Weight (kg)
SWIVELTLL10/1	1.0	LINKREC12/1	+	A10CTD	+	RINGBO12-70	70
SWIVELTLL16/1	1.5	LINKREC16/1	+	SWIVEL16/1	+	RINGBO16-85	1.70
SWIVELTLL19/1	3.2	LINKREC20/1	+	SWIVEL19/1	+	RINGBO19-110	3.10
SWIVELTLL22/1	4.4	LINKREC25/1	+	SWIVEL22/1	+	RINGBO25-130	5.30
SWIVELTLL25/1	5.6	LINKREC28/1	+	SWIVEL25/1	+	RINGBO28-150	7.90
SWIVELTLL28/1	10.0	LINKREC32/1	+	SWIVEL28/2	+	RINGBO32-150	11.20
SWIVELTLL32/1	12.5	LINKREC35/1	+	SWIVEL32/2	+	RINGBO35-140	14.30




LINKS

Split Links


Split links - Galvanised

Stock code	Size (inch)	ø (mm)	W.L.L. (ton)	Dimensions (mm) A	B	Weight (kg)
LINKSPLITG10	3/8”	10	0.1	50	16	8.5
LINKSPLITG12	1/2”	12	0.2	55	18	16.5
LINKSPLITG16	5/8”	16	0.3	72	21	33.0
LINKSPLITG19	3/4”	19	0.5	80	24	50.0
LINKSPLITG22	7/8”	22	0.6	88	27	75.0

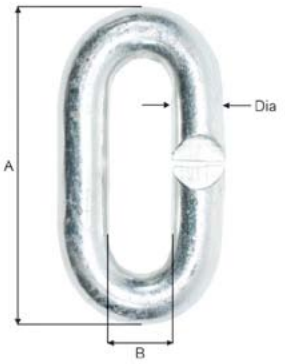


Split links - Stainless steel

Stock code	Size (inch)	ø (mm)	W.L.L. (ton)	Dimensions (mm) A	B	Weight (kg)
LINKSPLITSS10	3/8”	10	0.2	50	16	8.5
LINKSPLITSS12	1/2”	13	0.3	55	18	16.5
LINKSPLITSS16	5/8”	16	0.4	72	21	33.0
LINKSPLITSS19	3/4”	19	0.5	80	24	50.0
LINKSPLITSS22	7/8”	22	0.6	88	27	75.0

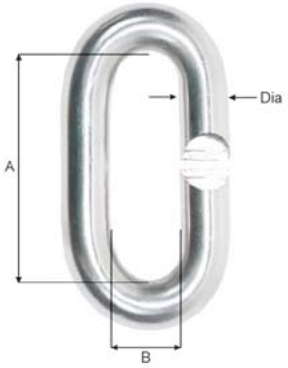

Split links - Chrome

Stock code	Size (inch)	ø (mm)	W.L.L. (ton)	Dimensions (mm) A	B	Weight (kg)
LINKSPLITCH14	9/16”	14	0.5	60	18	20.0
LINKSPLITCH16	5/8”	16	0.7	72	21	33.0
LINKSPLITCH19	3/4”	19	1.4	80	23	55.0
LINKSPLITCH22	7/8”	22	1.8	88	27	75.0

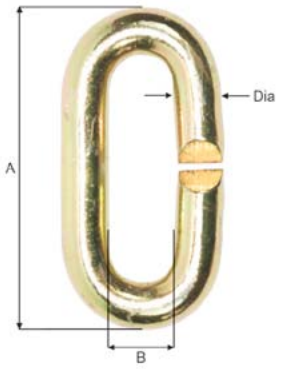


Split links - Boss - Stainless steel

Stock code	W.L.L. (ton)	Dimensions (mm) A	B	C	Weight (kg)
LINKBOSSDL18	0.2	78	45	18	0.17
LINKBOSSDL19	0.4	79	50	24	0.27
LINKBOSSDL20	0.5	82	55	24	0.30
LINKBOSSDL21	1.4	108	63	25	0.70
LINKBOSSDL22	1.3	106	68	33	0.60



LINKS


BMM G-hooks

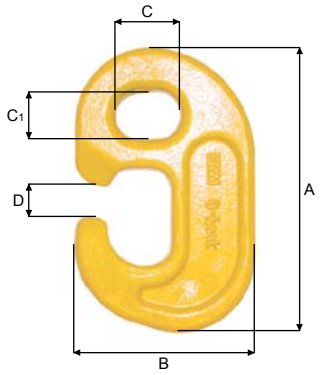

BMM G-hooks

High tensile steel

Part no.	WLL 5:1	Thickness	A	B	C	C_1	D	Weight
	ton	mm	mm	mm	mm	mm	mm	kg
EVG03	3.0	20	115	70	30	30	17	0.65
EVG05	5.0	26	132	82	38	38	17	1,20
EVG08	8.0	30	153	97	42	42	18	1.90
EVG10	10.0	35	180	115	40	30	18	3.30
EVG15	15.0	45	215	136	50	40	18	6.05
EVG20	20.0	50	240	155	60	50	27	8.40

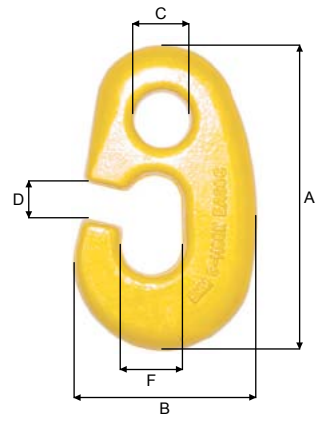


BMM G-hooks

High tensile steel

Part no.	WLL 5:1	Thickness	A	B	C	D	F	Weight
	ton	mm	mm	mm	mm	mm	mm	kg
EAG04	4.2	21	123	78	26	16	26	0.90
EAG06	6.4	32	175	103	28	21	28	2.65

BMM Master links

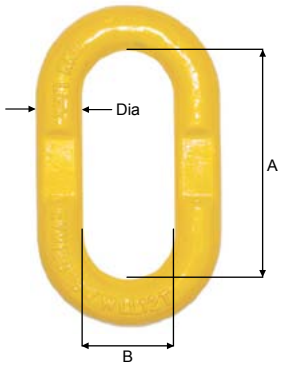


Part no.	WLL 5:1	Dia.	A	B	Recessed link	Weight
	ton	mm	mm	mm	mm	kg
EVM100	10.0	21	97	36	14	0.8
EVM120	12.0	25	118	48	16	1.7
EVM150	15.0	30	165	75	17	2.8
EVM200	20.0	34	180	85	25	4.2

LINKS

BMM Recessed Rings

High tensile steel


Part no.	WLL 5:1 ton	Thickness mm	A mm	B mm	C mm	Recssed link mm	Weight kg
EVR08	8.0	22	175	97	38	15	1.4
EVR10	10.0	25	205	140	40	17	2.5

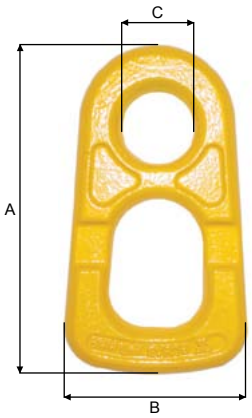

BMM Kelly's eyes

High tensile steel

Part no.	WLL 5:1 ton	Thickness mm	A mm	B mm	B_1 mm	C mm	C_1 mm	C_2 mm	Recessed link mm	Weight kg
EVR15	15.0	25	185	150	90	52	40	65	17	2.2
EVR20	20.0	41	225	185	125	80	45	106	25	5.1



Options of combinations


	EVG03	EVG05	EVG08	EVG10	EVG15	EVG20	EAG04	EAG06
EVR08	X	X	X					
EVR10			X	X				
EVR15					X			
EVR20						X		
EVM100	X	X	X				X	
EVM120				X				X
EVM150				X	X			
EVM200						X		

HOOKS

Grade 100 Eye Sling Hooks

- Forged Alloy Steel - Quenched and Tempered.
- Each hook has a Product Identification Code (PIC) for material traceability, along with the size and the name Crosby & U.S.A. in raised letters.
- 25% stronger than Grade 80.
- Eye Sling hooks incorporate two types of strategically placed markings forged into the product which address two (2) QUIC-CHECK® features: Deformation, Indicators and Angle Indicators.
- Low profile hook tip.
- Utilizes S-4320 integrated latch which meets the world standard for lifting.
- Heavy duty stamped latch interlocks with the hook tip.
- High cycle, long life spring.
- When secured with the proper cotter pin through the hole in the tip of hook, meets the intent of OSHA Rule 1926.1431(g) and 1926.1501(g) for personnel lifting.
- Individually Proof Tested to 2-1/2 times the Working Load Limit with certification.
- Suitable for use with Grade 100 and Grade 80 chain.
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles.
- “Look for the Platinum Color - Crosby Grade 100 Alloy products.”
- For further information and guidance refer to the latest Crosby catalogue available at www.thecrosbygroup.com






Grade 100 alloy chain size		A-1327 stock code	L-1327 stock code	Hook ID code	Weight each (kg)	Working Load Limit (t)*	Dimensions (mm)											S-4338 replacement latch kit stock code
(mm)	(in.)						C	D	G	J	K	M	N	O	Q	T	AA	
6	-	XCRS1327-06	XCRL1327-06	DA	0.23	1.45	84.8	72.9	18.5	22.9	16.0	16.0	9.1	22.6	19.1	22.1	38.1	XCRS4320-06
7 - 8	1/4-5/16	XCRS1327-07	XCRL1327-07	HA	0.59	2.6	107	99.1	26.2	30.0	19.1	19.1	12.7	29.2	19.1	29.5	50.8	XCRS4320-07
10	3/8	XCRS1327-10	XCRL1327-10	IA	1.04	4.0	127	110	30.2	38.9	30.2	25.4	14.2	35.6	23.9	31.2	63.5	XCRS4320-10
13	1/2	XCRS1327-13	XCRL1327-13	JA	2.04	6.8	161	144	36.6	45.2	34.8	29.7	18.3	42.4	28.4	47.8	76.2	XCRS4320-13
16	5/8	XCRS1327-16	XCRL1327-16	KA	3.81	10.3	189	172	47.8	60.5	42.2	36.6	22.4	56.1	33.3	51.6	102	XCRS4320-16
18-20	3/4	XCRS1327-19	XCRL1327-19	KA	6.80	16.0	230	189	57.2	58.2	47.8	41.4	28.2	52.8	62.0	62.7	102	XCRS4320-19
22-23	7/8	XCRS1327-22	XCRL1327-22	LA	9.39	21.0	256	211	65.8	63.5	55.6	49.3	32.3	57.7	72.1	66.5	102	XCRS4320-22
26	1	XCRS1327-32	XCRL1327-32	NA	17.9	27.1	326	262	76.2	83.8	68.3	60.5	39.6	76.7	88.9	71.9	127	XCRS4320-32
32	1 1/4	XCRS1327-27	XCRL1327-27	PA	47.6	41.0	462	357	116	108	95.3	81.0	50.8	76.2	114	98.6	178	XCRS4320-27

* Ultimate load is 4 times the Working Load Limit.

SAFETY HOOKS


BMM Safety Hooks

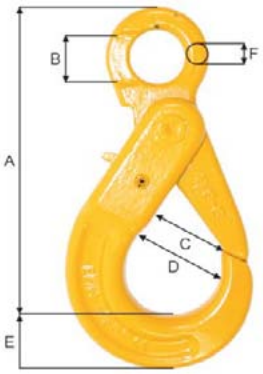

Product code	WLL 4:1	A	B	D	E	F	Weight
	tonne	mm	mm	mm	mm	mm	kg
HOOKCLAN06	1,1	121	**22**	**34**	**20**	**10**	**0,5**
HOOKCLAN08	2,0	150	**25**	**46**	**24**	**12**	**0,8**
HOOKCLAN10	3,2	182	**32**	**56**	**28**	**13**	**1,5**
HOOKCLAN13	5,0	224	**40**	**69**	**41**	**17**	**2,8**
HOOKCLAN16	8,0	274	**50**	**86**	**51**	**20**	**5,4**
HOOKCLAN18	12,5	317	**61**	**100**	**62**	**27**	**10,0**
HOOKCLAN22	15,0	350	**72**	**98**	**65**	**30**	**13,0**

S-1316 SHUR-LOC® Eye Hook with Positive Locking Latch



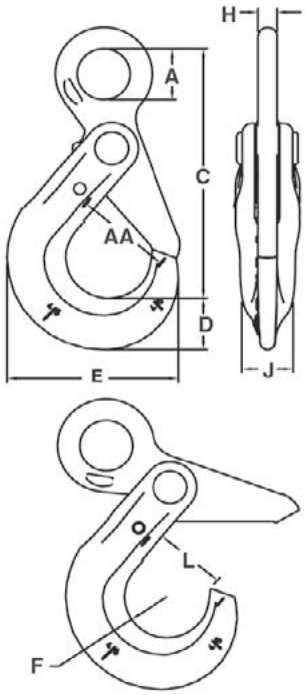

All SHUR-LOC® hooks have the following features:

- Forged alloy steel, Quenched & Tempered.
- Recessed trigger design is flush with the hook body, protecting the trigger from potential damage.
- Easy to operate with enlarged thumb access.
- Positive lock latch is self-locking when the hook is loaded.
- The SHUR-LOC® hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.
- Contact Engineered Solutions for additional threading or Split-Nut options at thecrosbygroup.com/engineeredsolutions.
- Eye Style incorporates these added features:
- Individually Proof Tested to 2-1/2 times the chain Working Load Limit with certification.
- S-1316 meets the performance requirements of EN1677-3.
- Suitable for use with Grade 100 and Grade 80 chain.
- Designed with 'engineered flat' to connect to S-1325 chain coupler


Chain Size (mm)		Crosby Stock No.	Working Load Limit (t) 5:1	Weight Each (kg)	Dimensions (mm)								
					A	C	D	E	F	H	J	L	AA*
6		1022896	1.00	.39	19.8	100	20.1	66.0	17.0	7.87	16.0	29.5	38.1
7-8		1022914	1.90	.82	27.4	135	27.9	88.9	22.1	9.91	20.6	37.6	51.0
10		1022923	2.50	1.54	33.0	167	29.7	112	27.9	12.9	23.9	46.5	63.5
13		1022932	5.62	2.72	41.9	209	42.4	139	32.0	17.0	29.5	56.4	76.2
16		1022941	7.53	6.83	55.9	256	51.8	167	38.1	22.1	38.1	67.3	89.0
18-20		1022952	9.98	8.61	64.0	274	56.4	197	51.1	22.1	51.6	89.4	-
22		1022943	12.0	12.7	72.9	317	62.2	222	57.7	24.9	55.9	97.3	-
26		1022944	-	22.45	80.0	371	81.5	251	62.5	32.0	68.1	104	-

HOOKS

Sling, Cargo Hooks


Sling hooks - With latch

Stock code	W.L.L. (ton)	Dimensions (mm) A	B	C	D	Weight (kg)
HOOKESH07	2.0	24	94	24	12	0.5
HOOKESH10	3.2	29	126	32	16	1.0
HOOKESH13	5.1	37	152	40	17	1.7
HOOKESH16	8.1	48	203	50	23	3.0

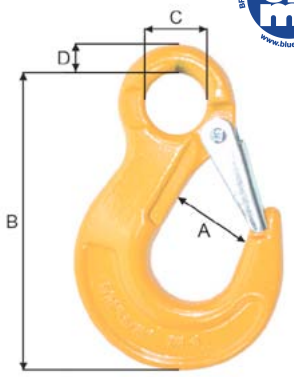

Cargo hooks - With stainless steel latch

Stock code	W.L.L. (ton)	Dimensions (mm) A	B	C	D	E	F	Weight (kg)
HOOKBL10	1.0	21	30	19	73	110	20	0.28
HOOKBL15	1.5	28	32	23	82	125	22	0.40
HOOKBL20	2.0	30	35	28	87	141	26	0.57
HOOKBL30	3.0	31	42	32	102	167	30	0.91
HOOKBL45	4.5	38	47	39	120	205	40	1.70

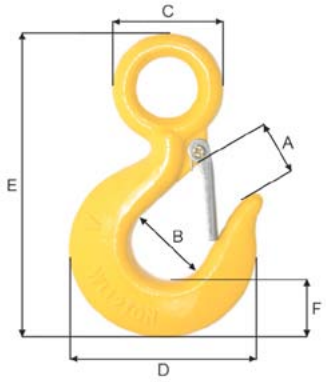


HOOKS

YOYO Hooks


Slip hooks - Available galvanised (enquire when ordering)

Stock code	Size (inch)	W.L.L. (ton)	Dimensions (mm) A	B	C	Weight (kg)
HOOKBS06	6”	1.0	165	18	32	0.84
HOOKBS10	10”	1.5	254	19	48	2.05
HOOKBS12	12”	2.8	320	27	49	3.85
HOOKBS14	14”	4.8	350	27	50	5.75
HOOKBS15	15”	7.0	385	36	40	9.61
HOOKBS16	16”	11.0	385	36	64	17.80
HOOKBS16H	16”	14.0	400	42x46	65	19.50

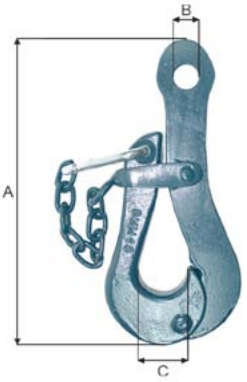

Yo-Yo hooks

Stock code	W.L.L. (ton)	Dimensions (mm) A	B	C	D	Dia.	Weight (kg)
HOOKYO30	3.0	280	170	40	30	30	2.2
HOOKYO40	5.0	300	185	40	30	40	3.9

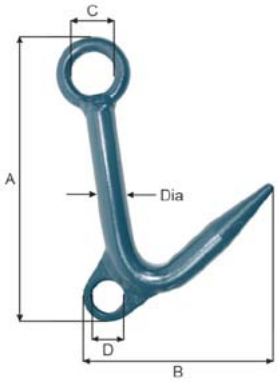

Gilson hooks

Stock code	W.L.L. (ton)	Dimensions (mm) A	D	C	Weight (kg)
HOOKGIL45	4.5	330	60	66	3.5
HOOKGIL65	6.5	375	67	68	5.7

